

ADJUSTABLE RACKING - POLYPROPYLENE OR ALUMINIUM SHELF RACKS



The various components link together without additional parts, and the dovetail assembly of the horizontal crossbars ensures perfect horizontal and vertical stability.



Fixing an angle support



SPECIFICATIONS

- Easy: no tools required, by simple fitting.
- Quick: one person in less than 15 min (3 linear meters).
- Packaging facilitates the order of assembly.
- 3 to 7 possible levels of storage on anodised aluminium cross-pieces and hanging supports in fixed monobloc aluminium.
- Optimum storage: combinations of the standard modules in 108 mm steps, return brackets without post.
- Great modularity in length, depth and height.
- Complete adaptability whatever the configuration: in L, U or more complex may be.
- No storage on the floor and access for cleaning: ground distance to the lower level : 181 mm.
- Easy to clean (shelf racks : in the dishwasher with standard detergents - structure : with sponge or water jet).
- Limits the risk of the accumulation of bacteria: absence of bad or unblocked holes.
- Maximum load per linear meter and level : polypropylene shelf racks 100 kg - Aluminium shelf racks 150 kg.
- Temperature resistance of the shelf racks : from -20°C to +60°C.
- Maximum load between two ladder frame : 600 kg.
- In catering utilization, long life of materials.
- Complete rigidity of the structure.
- Three depths of shelving are available :
 - Overall depth 425 mm
 - Overall depth 500* mm
 - Overall depth 600 mm

On corners, you can adapt shelving units of different widths (ex. a 600 mm width corner unit onto a basic 425 mm unit or reverse).

* Depth 500 mm : available only with aluminium shelf racks.



PRÉSERVER LE GOÛT

ADJUSTABLE RACKING - POLYPROPYLENE OR ALUMINIUM SHELF RACKS


Modular supports :
2 types of shelf racks




From 3 to 7 levels modularity

Modular over 3 depths


Polypropylene shelf rack :
Depth : 600 mm and 425 mm

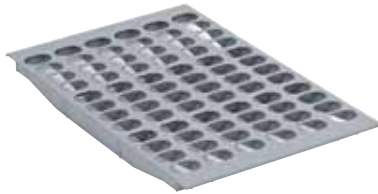

Aluminium shelf rack :
Depth : 600, 500 and 425 mm

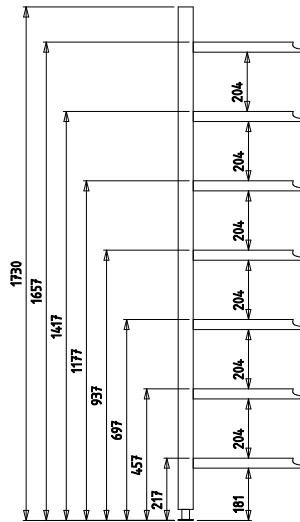


Effective space between levels

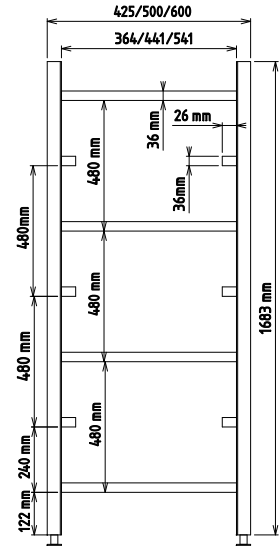

Modular length :

a and b for the two shelf widths (a : 325mm, b : 433 mm) and 9 basic modules
enable to obtain different lengths in 108 mm steps.

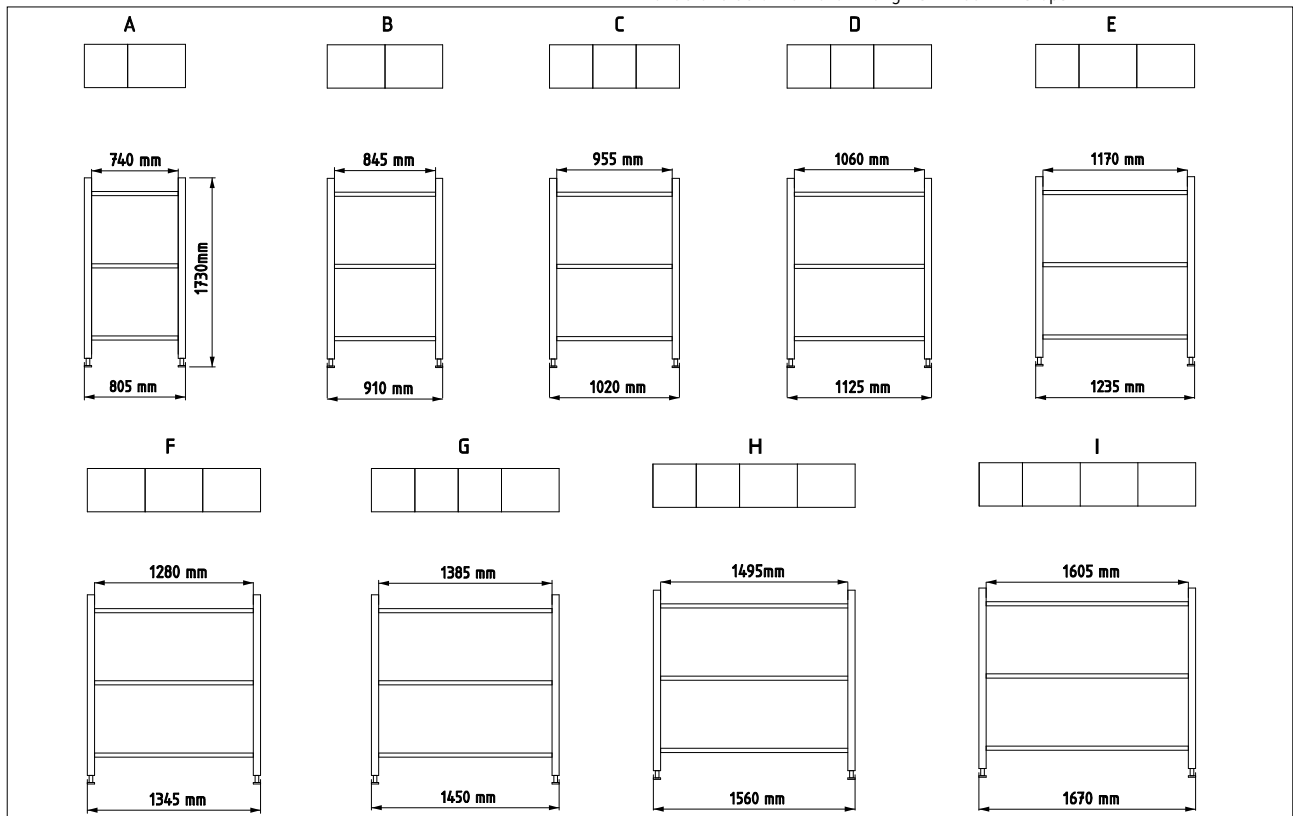

PRÉSERVER LE GOÛT